

# Presona Stationary Compactor Model K

## RATIONAL WASTE HANDLING

Presona design and supply turn-key systems to meet all needs, large and small. Our experience and knowledge combined with a wide range of models and accessories ensures maximum customer benefit.

With the K 230/330 M model, Presona address the needs of users with high demands in terms of reliability and performance:

- the recycling industry
- waste contractors
- wholesalers
- large warehouses
- the manufacturing industry
- hospitals
- the packaging industry
- the graphics industry



## Max adaption to requirements

There is a wide range of accessories to meet every need. Here are just some of the features we offer

- 75/100 % full container indicator
- photocell for start/stop
- guide rails for easy centring of containers
- adjustable presser plate limit position stop
- oil level gauge
- dual control placed at feed opening
- drainage in container for wet materials
- bin-lifter for standard and special bins
- hydraulic container claws
- container claws for wall-mounting
- starter line for starting from, e.g. a truck

## Valuable features

Presona's compactor is designed to cope with heavy and difficult operating conditions and can work 24 hours a day – a real work-horse!

It has a robust construction and great emphasis has been put on user- and service friendliness.


Carefully selected and tested electrical and hydraulic components guarantee both reliability and performance.

The risk of expensive downtime is kept to a minimum by our efficient service organisation and the option of signing contracts for preventive service.

As part of our continuing product improvement, specifications are subject to change without notice.

  
A Member of the Orwak Group

# Presona Stationary Compactor Model K

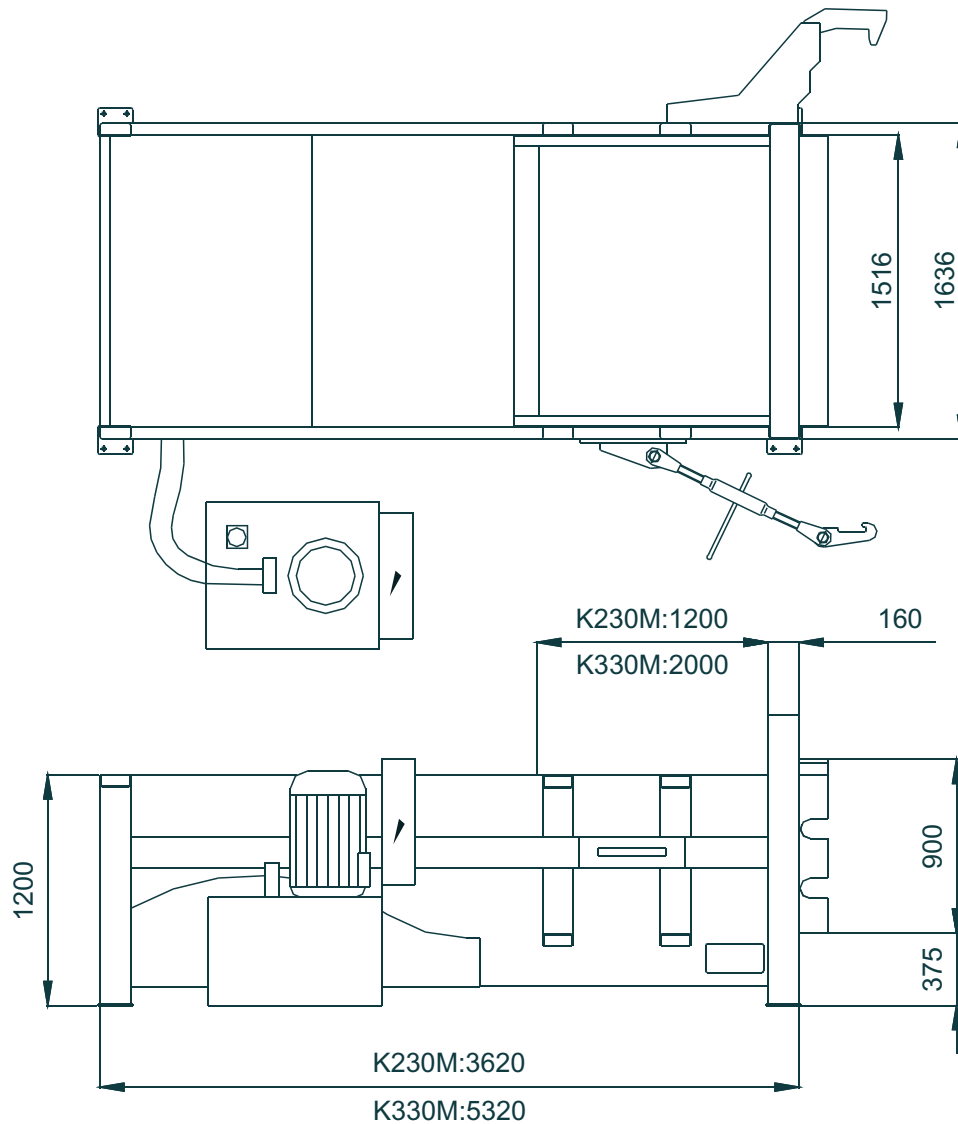

## Technical Data

	K 230 M				K 330 M		
	5,5	7,5	11	22	7,5	11	22
<b>Press force kN</b>	300				300		
<b>Stroke volume m<sup>3</sup></b>	1,8				2,7		
<b>Motor power kW</b>	5,5	7,5	11	22	7,5	11	22
<b>Capacity m<sup>3</sup>/h</b>	44	68	145	290	70	150	315
<b>Cycle time s</b>	106	69	32	16	107	50	24

As part of our continuing product improvement, specifications are subject to change without notice.

**Presona**  
A Member of the Orwak Group

Presona AB, PO Box 63, SE-273 22 Tomelilla. Tel: +46 417-199 00, Fax: +46 417-199 32  
E-mail: sales@presona.se | www.presona.com